


Installation Instructions

Up/Down Fixture




Installation

1. Remove all components from packaging. Please note that there may be a package of mounting hardware included.
2. The unit will come fully assembled and it will be necessary to take it apart in order to mount it on a wall.
3. Remove the 6 countersunk tamper proof screws (3 on top and 3 at the bottom of the unit) with a Torx 30 bit.

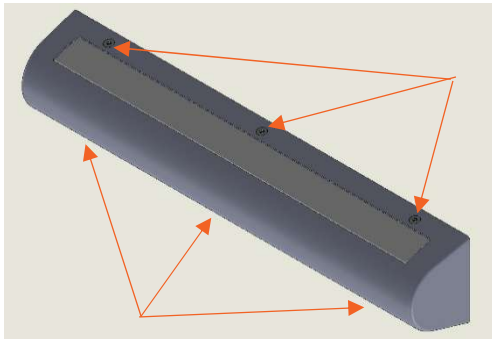


4. Remove the top cover from the chassis in order to see the drill pattern of the chassis.
5. If a color and wattage selectable unit was ordered then the appropriate switch setting on the back of the unit may need to be set to the desired setting prior to mounting on the wall.
If a Circadian Rhythm (APP/Remote Controlled) unit was ordered, then there are no preset setting to adjust on the back of the unit.

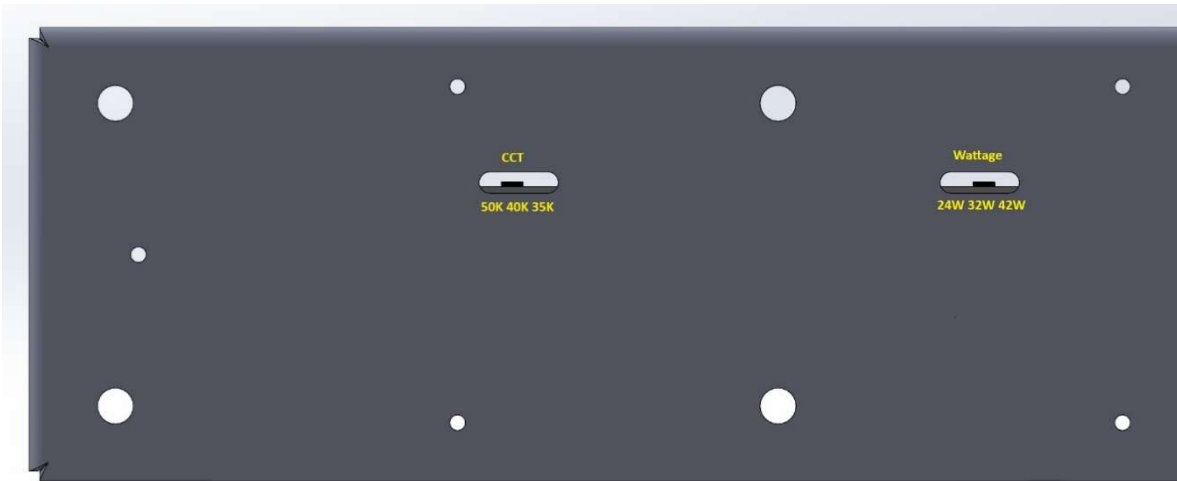

6. After setting the wattage and CCT (If required) the unit is ready to be mounted to the wall.
7. If a night/count light was ordered, determine whether you want the night/count light to be facing up or down. This is the side of the chassis that has two LED strips.



8. You will be using the assembled fixture frame as the template to mark or drill pilot holes/finished holes, depending on your choice of anchor. Mark or drill the eight (8) mounting holes on the wall.

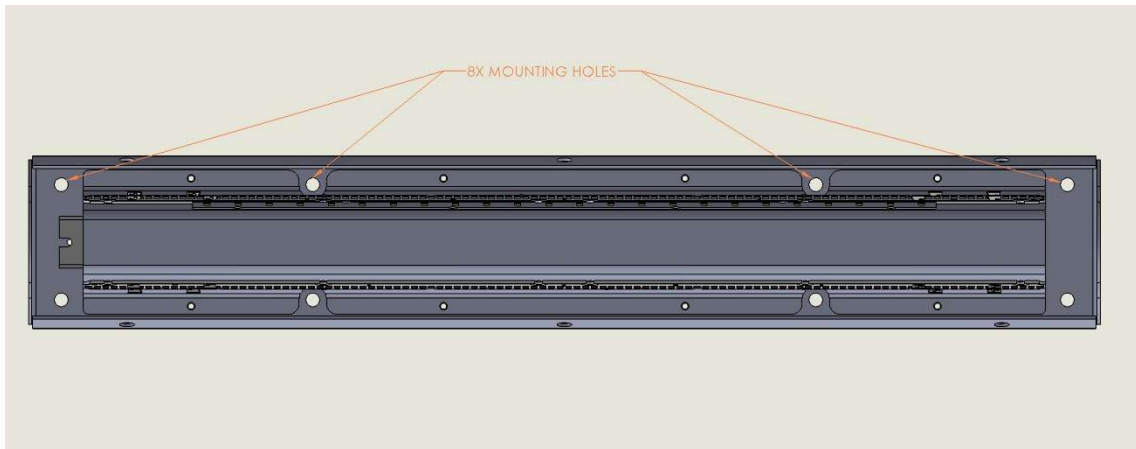

9. Prior to mounting the unit, all electrical connections must be completed. The unit can be wired to either 120Vac or 277Vac. There may be two sets (pairs) of independent wires coming out of the chassis if a night/count light was ordered. Black wires are (+) or Hot, White wires are (-) or neutral and a Green wire is ground.
10. Depending on the concrete / brick fastener of choice, you can have another person hold the fixture tightly in place against the wall while you run the fasteners in. *THREAD LOCKER IS HIGHLY RECOMMENDED FOR ALL FASTENERS*
11. After mounting the chassis to the wall ensure all wiring is complete. At this point an electrical test can be done to ensure the wiring is correct.
12. Now place the top cover over the chassis and reinsert the 6 countersunk screws with a T30 bit. *THREAD LOCKER IS HIGHLY RECOMMENDED FOR ALL FASTENERS*
13. The final step upon completion of installation will be to add caulk around any edges of the fixture that do not sit perfectly flush against the wall. (Seen most often with Brick / Concrete.)