

LED Low Bay USER GUIDE

NOTE

Please read this entire manual to understand how to safely use this product. Specifications are subject to change without notice. Please visit www.shatrshield.com for the most recent user guide versions.

INCLUDED IN THIS BOX

Shat-R-Shield Inc. LED Lowbay light engine, QTY 1
3/4" NPT hook, QTY 1
User Guide, QTY 1

UNPACKING

- 1) Unpack and carefully examine the product.
- 2) Report any damage and save all packing materials if any part(s) were damaged during shipping.
- 3) Do not attempt to use this light engine if it is damaged.

INSTALLATION INSTRUCTIONS

- 1) Consult a qualified electrician to ensure correct installation into your facility.
- 2) The product should be installed by a qualified electrician or technician in accordance with relevant local codes.
- 3) There is always a risk of electric shock when installing electrical devices. Ensure that the main power source is off when wiring the product.

INSTALLATION STEPS


- 1) Attach the light engine to the reflector.
- 2) Tighten the reflector screws to the light engine.
- 3) Screw the hanging hook to the lowbay.
- 4) Ensure the hanging hook is tightened as far as possible. Tighten set screw to secure the hanging hook to the driver housing.
- 5) Hang the lowbay to an eye bolt or hook in the ceiling.
- 6) Connect the input and ground wires of the lowbay to the supplied power. Optional: Connect 0-10V dimming wires. The black wire is positive (+) and the white wire is negative (-) for the dimming cord. Should you choose to forgo the dimming capabilities, simply cut the dimming wires flush with the top of the fixture housing or cap the ends of each separately.

MAINTENANCE


- 1) Disconnect the product from the power supply prior to cleaning.
- 2) Use a dry or slightly moistened cloth for cleaning.

[Installation Photos on Back Side]


1

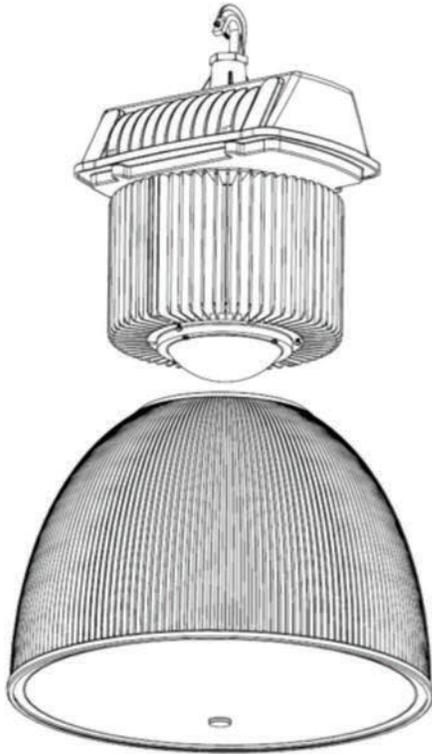


2

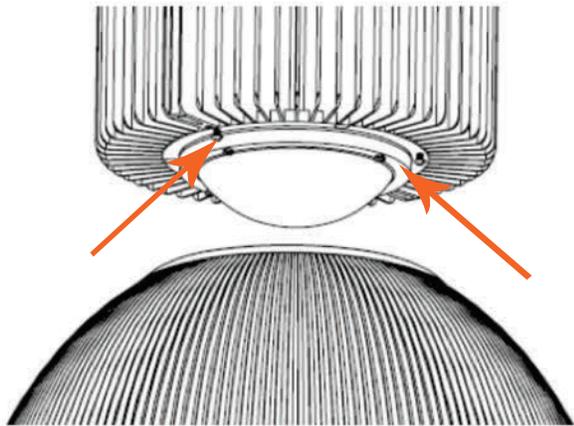

3

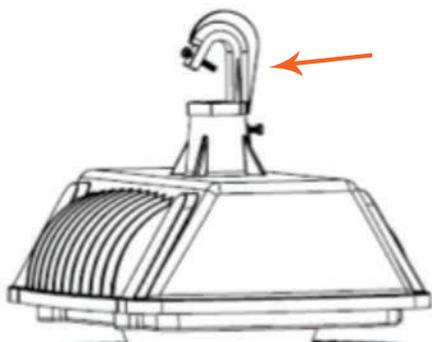

4



5



6

